




550 Series Multimedia Kit Installation Instructions

Step 1. Remove the storage box and ROP cover, left

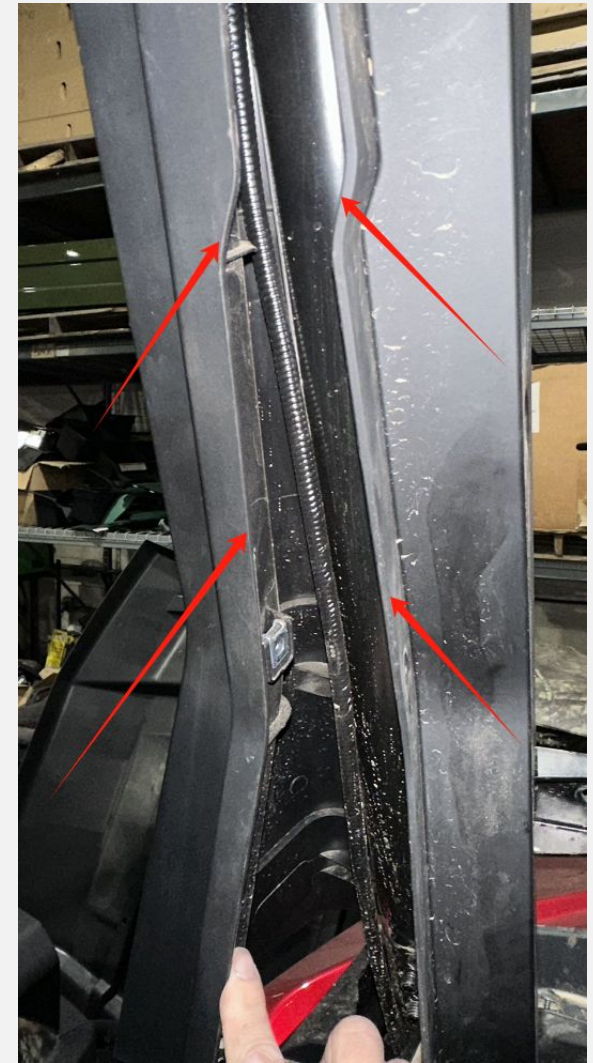

1. Remove the storage box, three switches and one cigarette lighter on the storage box. (Keep them, and install onto the screen mounting box finally)
2. Remove the bolts on the ROP cover. Don't need take the ROP cover away, just go through the ceiling power cord .

Step 2. Arrange the camera wire.

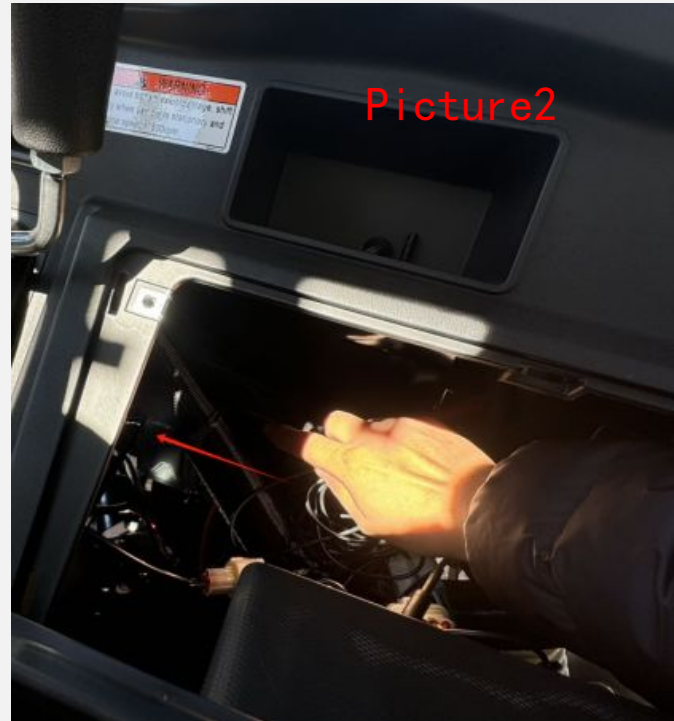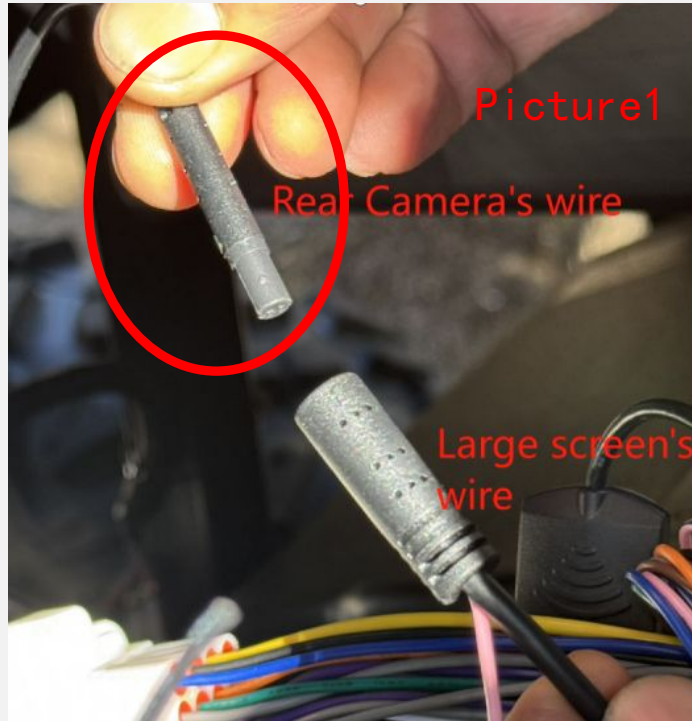


1. Take out the camera wire. Distinguish the two ends of the wire. Insert the thinner end into the screen wire.
2. Arrange the other thicker end to the camera at the end of the vehicle frame along with main wire. Secure with nylon ties. See Picture 2.


Go through under the removable hood.



Go through under the seat.

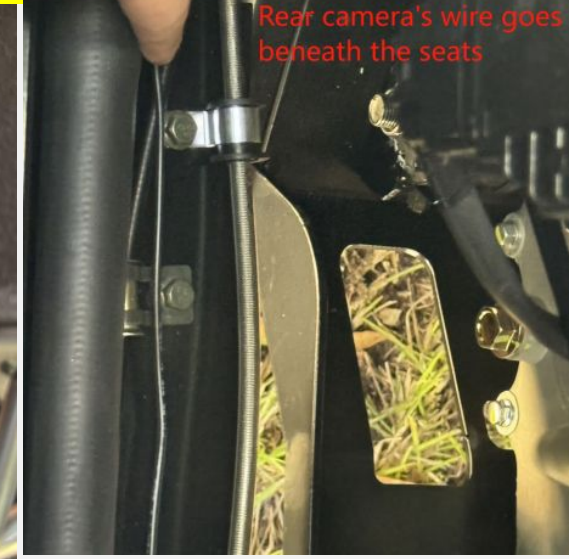

Step 3. Install the rear camera.

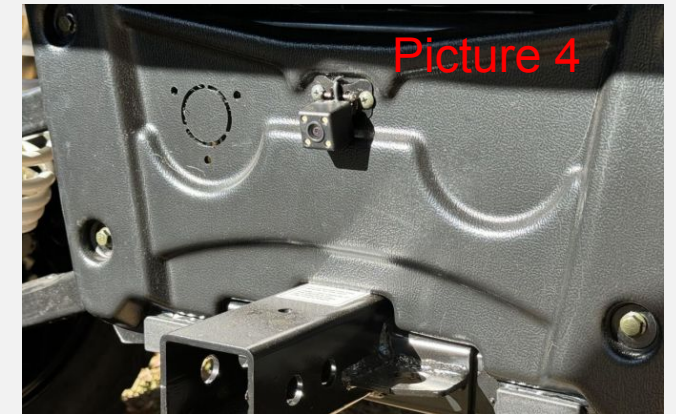

1. Secure the cable on the frame with nylon tie. See Picture 1.
2. Install the camera on the rear drag power supply mounting plastic plate. See Picture 2.
3. Connect the end of the camera wire to the camera.

Please mind that the metal sheet's position should be above the camera. Otherwise, the camera will be installed upside down and so does the camera's image.

Step 4. Install the speaker




Install the speaker on the front RoP.





Note: Exposed power cord plug

Step 5. Arrange the ceiling power cord and radio antenna

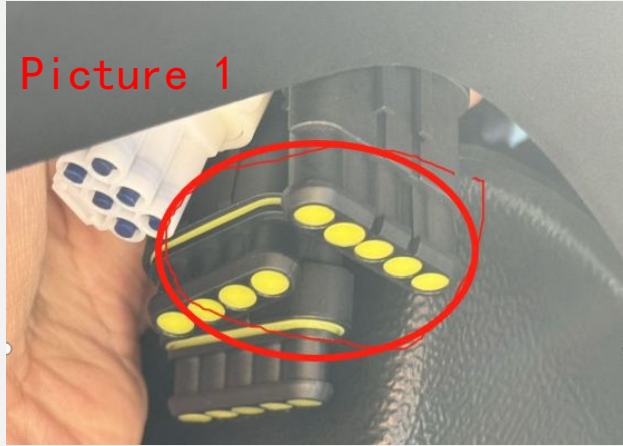


1. Find the plug-in in the ROP(L,F).See Picture 1
2. Arrange the ceiling power cord and radio antenna on the ROP. Secure with the nylon tie. See Picture 2

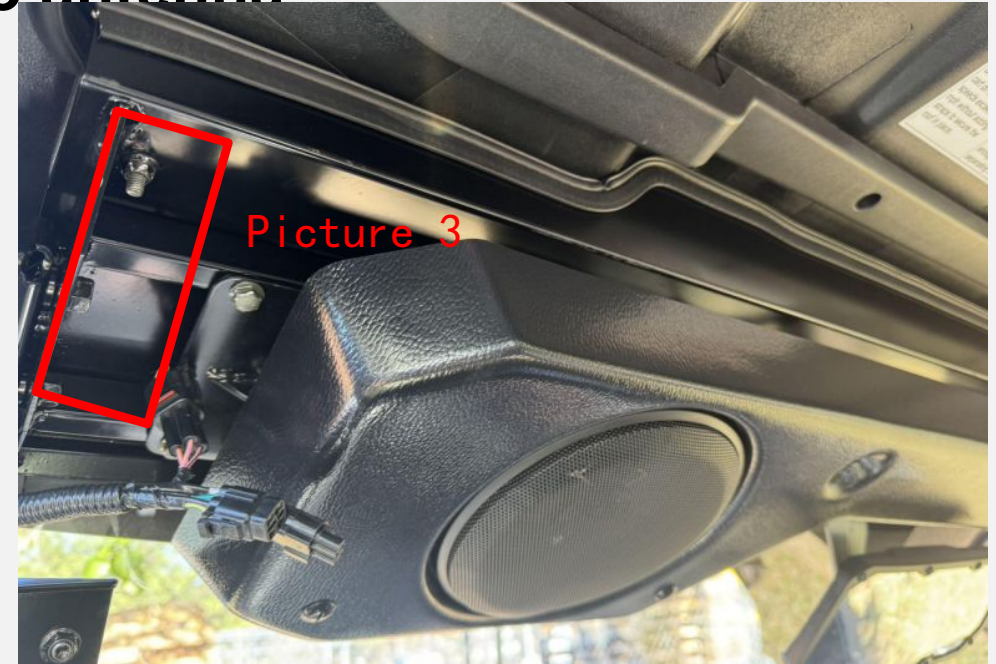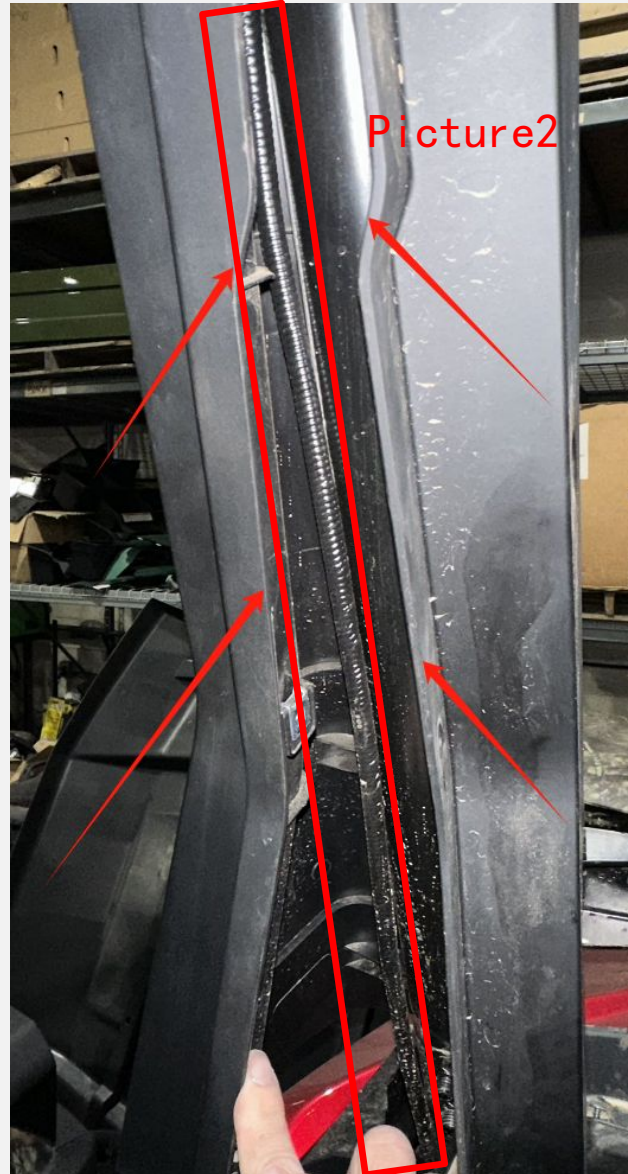

3. Insert the bottom of ceiling power cord into the yellow plug in Picture 1.
4. Insert the top of ceiling power cord into the speaker plug.
5. Peel away the backing tape of the radio antenna, and paste the radio antenna on the back of the bar, facing to the roof.
6. Install the bolts onto the ROP cover.

Step 6. Install the Multimedia Screen


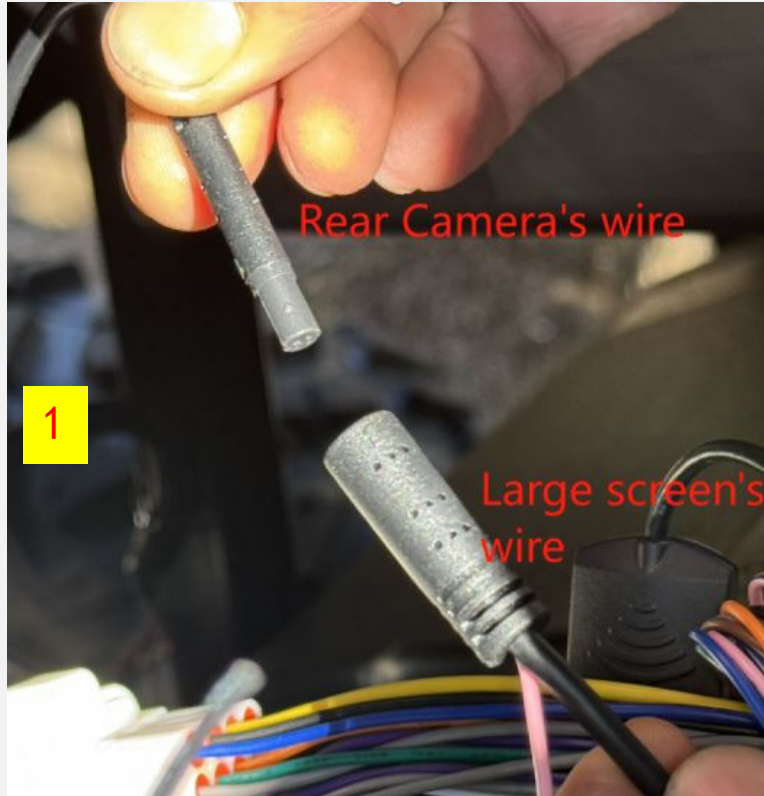


1. Connect the camera wire with the screen wire.
2. Connect USB
3. Connect the radio antenna.



4. Connect the screen and main wire.
5. Install the switches and cigarette lighter on screen installation box.
6. Install the screen box onto the instrument panel.

The main wire - screen plug

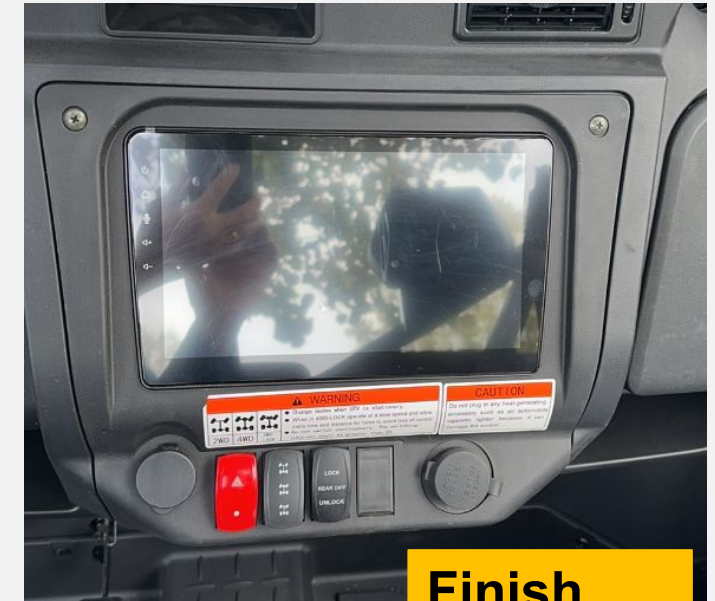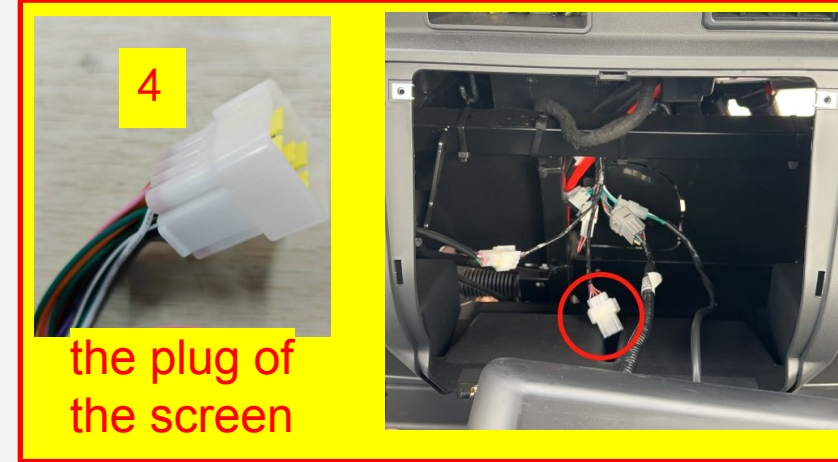

Contact us if you need

(770) 682-3035

support@bighornpowersports.com